

PERMAVOID 150

Permavoid 150 is a modular interlocking polypropene geocellular unit. It is designed as a high strength, lightweight and shallow subbase replacement system. The system is characterized by its exceptionally high compressive strength and bending resistance. The units are connected with PermaTies to create a rigid horizontal structural



'raft', ideal for multifunctional subbase applications. In combination with the Permavoid Capillary Cylinders the system can be used in water sensitive urban design, enabling stormwater attenuation, conveyance and natural capillary plant irrigation without the use of energy, pumps or in-building water storage tanks.

Applications

- Parkings
- Roads
- Bicycle paths
- Blue-Green roofs
- Podium Decks
- Sports
- Equestrian
- Urban Trees
- Landscaped SUDS
- Hardscaped SUDS and lightweight rigid subbase replacement

GENERAL

Brand	Permavoid
Product name	Permavoid 150
Item nr.	3550005
Color	Black
Material	Polypropene (CoPo)
Material description	Frost and resistant, hydrofoob, inert, acid and hydrocarbon resistant, impervious to bacterial and fungal growth
Recycled/Virgin	Recycled material
Lifespan	> 50 years

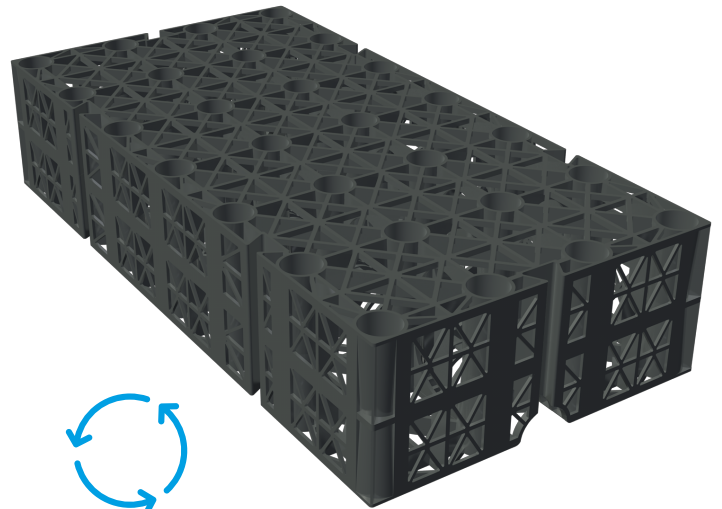

For capillary irrigation PDS-1B will be added.

PERMAVOID 150

SIZE

Size	708 x 354 x 150 mm (l x b x h), approx. 0,25 m ² , +/- 1%
Weight	approx. 3 kg
Color	Black
Coefficient of Linear Thermal Expansion	0,0004 - 0,0008 m/m K
Volumetric void ratio	> 95%
Perforated surface ratio	> 59%
Compressive strength (safe design strength)	715 kN/m ²
Short-term vertical deflection	126 kN/m ² /mm
Necessary ancillaries (included)	PermaTies: each unit is tied to the next with 5 x 2 (bottom and top) conical PermaTies to create a stable raft. Removable, reusable.
Optional Ancillaries	Capillary Irrigation Cylinders (3520005 and 3520006 form one complete cylinder). Shear Connector (3510004)

PACKAGING

Packaging	Single units on a pallet. Foil wrapped
Pallet size	1.200 x 1.100 x 2.300 mm (l x w x h)
Pallet capacity	72 pieces, 18m ²
Pallet total weight	217 kg
Storage instruction	Prevent exposure to direct sunlight during long term storage
HS Code	39269097

Notes

Permavoid Ltd. will not be held liable if our products are used in a manner inconsistent with our requirements, standards or the purposes indicated in the standards. Standards can be obtained at www.permavoid.com. This document is not contractual. With our constant concern for improvements, the information this document contains and the products presented may be modified without notice. The latest version of this document can be obtained at www.permavoid.com. Please get in touch with us if you require any further documentation or information.

Data Sheet: PDS-1A
Last revised: January 2021

Permavoid Head Office

Kattenburgerstraat 5

1018 JA | Amsterdam | The Netherlands
www.permavoid.com | info@permavoid.co.uk

Permavoid Ltd. is part of the Polypipe Group.